


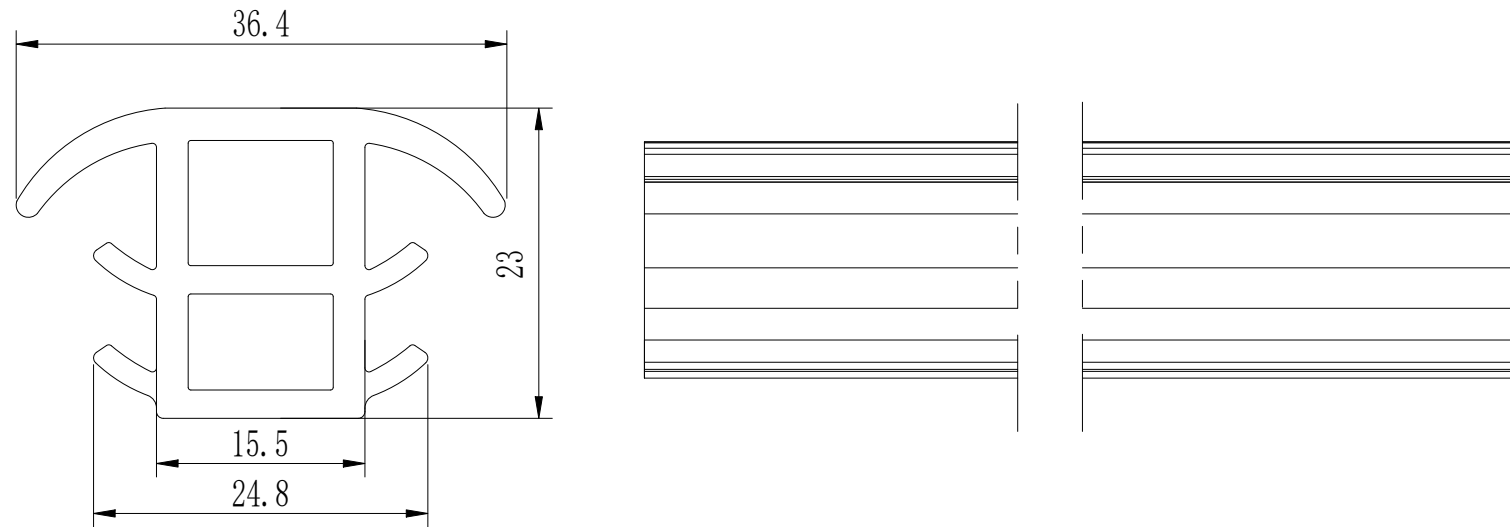

技术要求:

- 1、硬度EP70±5
- 2、表面不得有气泡、飞边、烧焦、裂痕、毛刺、变形等缺陷；
- 3、未注公差按M2级 (GB/T 3672.1-2002)；
- 4.可填缝17-20mm

LIMITS \ CLASS	A	B	C	D			Unless other specified, the main demension unit is mm	 科锐欧(厦门) 新能源科技有限公司 xiamen corigy new energy technology CO.,LTD. TEL: 0592-6883200 E-mail: sales@corigy.com																
	±0.05	±0.10	±0.20	±0.30				Part NO.				Item		QTY										
	±0.10	±0.15	±0.30	±0.40								Auw												
	±0.15	±0.20	±0.40	±0.50				Mat.				VER.	1:0	Stage	Concept	Sample	SBP	MP						
	±0.25	±0.30	±0.50	±0.60	VER.	Chang Mark		DCN NO.	QA. /Date															
±0.30	±0.40	±0.60	±0.70	Chang History			Approved/Date	WT										Scale	1:2	Page	1 / 1	View		