
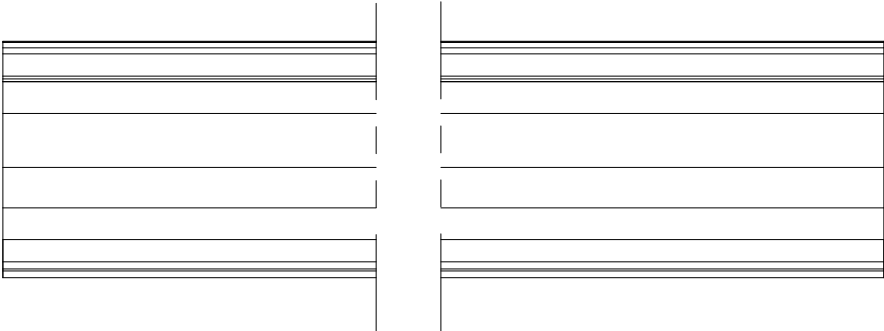


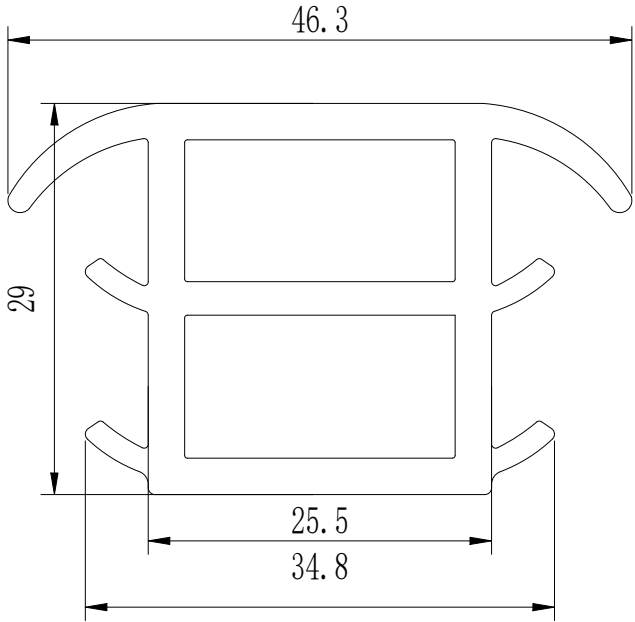

技术要求:

- 1、硬度EP70±5
- 2、表面不得有气泡、飞边、烧焦、裂痕、毛刺、变形等缺陷;
- 3、未注公差按M2级 (GB/T 3672.1-2002);
- 4.可填缝26-30mm

CLASS LIMITS	A	B	C	D				Unless other specified, the main demension unit is mm		CORIGY Create Re-Energy 科锐欧(厦门)新能源科技有限公司 xiamen corigy new energy technology CO.,LTD. TEL: 0592-6883200 E-mail: sales@corigy.com									
	±0.05	±0.10	±0.20	±0.30						Part NO.	Item		QTY	A UW					
	±0.10	±0.15	±0.30	±0.40				Drawn/Date											
	±0.15	±0.20	±0.40	±0.50				Checked/Date											
	±0.25	±0.30	±0.50	±0.60	VER.	Chang Mark	DCN NO.	QA. /Date		Mat.		VER.	1.0	Stage	Concept	Sample	SBP	MP	✓
	±0.30	±0.40	±0.60	±0.70	Chang History			Approved/Date		WT		Scale	1:2	Page	1 / 1	View			